




HIGH-PERFORMANCE AGM MAINTENANCE-FREE BATTERIES

- This new generation of maintenance-free batteries delivers higher cranking amps for vehicles that require extra starting power
- Additional cranking amps make these one of the most powerful batteries on the market
- Acid pack included, except where noted as Factory-Activated

NOTE: Factory-Activated batteries should be charged once a month when not in service.

NOTE: See pages 852-893 for battery application chart.



YUASA REFERENCE #	CAPACITY AH (10H-R)	REGULAR CHARGE CURRENT (AMP)	COLD CRANKING AMPS @-18 °C (0 °F)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ ACID	TERMINAL CONFIGURATION	PART #
YTX14AH-BS (includes 10mm height spacer for use in replacing YB14A-A1 and YB14A-A2)	12	1,2	210	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	5 kg (11,1 lb)	+	- YTX14AH-BS
YTX14AH (Factory-Activated; includes 10mm height spacer for use in replacing YB14A-A1 and YB14A-A2)	12	1,2	210	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	5 kg (11,1 lb)	+	- 2113-0758
YTX14AHL-BS	12	1,2	210	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	5 kg (11,1 lb)	-	+ YTX14AHL-BS
YTX14AHL (Factory-Activated)	12	1,2	210	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	5 kg (11,1 lb)	-	+ 2113-0759
YTX14H-BS	12	1,2	240	152 mm (6")	87 mm (3 ⁷ / ₁₆ "	146 mm (5 ³ / ₄ "	4,8 kg (10,6 lb)	+	- 2113-0034
YTX14H (Factory-Activated)	12	1,2	240	152 mm (6")	87 mm (3 ⁷ / ₁₆ "	146 mm (5 ³ / ₄ "	4,8 kg (10,6 lb)	+	- 2113-0106
YTX20CH-BS	18	1,8	270	152 mm (6")	87 mm (3 ⁷ / ₁₆ "	162 mm (6 ³ / ₈ "	6,1 kg (13,4 lb)	+	- 2113-0015
YTX20H-BS	18	1,8	310	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	156 mm (6 ¹ / ₈ "	6,8 kg (15,1 lb)	+	- YTX20H-BS
YTX20H (Factory-Activated)	18	1,8	310	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	156 mm (6 ¹ / ₈ "	6,8 kg (15,1 lb)	+	- 2113-0755
YTX20HL-BS	18	1,8	310	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	156 mm (6 ¹ / ₈ "	6,8 kg (15,1 lb)	-	+ YTX20HL-BS
YTX20HL (Factory-Activated)	18	1,8	310	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	156 mm (6 ¹ / ₈ "	6,8 kg (15,1 lb)	-	+ 2113-0104
YTX20HL-BS-PW (includes 20mm height spacers for use in replacing YB16CL-B)	18	1,8	310	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	175 mm (6 ⁷ / ₈ "	6,8 kg (15,1 lb)	-	+ YTX20HL-BS-PW
YIX20HL-BS (preferred cold climate performance)	18	1,8	320	175 mm (6 ⁷ / ₈ "	87 mm (3 ⁷ / ₁₆ "	156 mm (6 ¹ / ₈ "	6,8 kg (15,1 lb)	-	+ 2113-0493
YTX24HL-BS	21	2,1	350	206 mm (8 ¹ / ₈ "	87 mm (3 ⁷ / ₁₆ "	162 mm (6 ³ / ₈ "	7,9 kg (17,5 lb)	-	+ YTX24HL-BS
YTX24HL (Factory-Activated)	21	2,1	350	206 mm (8 ¹ / ₈ "	87 mm (3 ⁷ / ₁₆ "	162 mm (6 ³ / ₈ "	7,9 kg (17,5 lb)	-	+ YTX24HL

DISCLAIMER: SEE PAGE 4 FOR IMPORTANT INFORMATION REGARDING CERTAIN WARRANTY AND EMISSION CONTROL REGULATORY COMPLIANCE INFORMATION




- EXHAUST
- LUGGAGE
- COVERS & SECURITY
- GENERAL ACCESSORIES
- WINDSHIELDS
- FAIRINGS & BODY
- SEATS & SISSY BARS
- HANDLEBARS & HAND CONTROLS
- FOOTPEGS & FOOT CONTROLS
- LIGHTING
- ELECTRICAL & GAUGES**
- SPROCKETS
- CHAINS & DRIVE BELTS
- WHEELS & ACCESSORIES
- BRAKES
- SUSPENSION
- ENGINE
- FUEL/AIR SYSTEMS
- AUDIO/VIDEO & MOUNTS
- RIDER ACCESSORIES
- HARDWARE & MERCHANDISING
- INDEX

AGM (MAINTENANCE-FREE) BATTERIES

- Special absorbed-glass mat battery eliminates water loss, permitting the battery to be permanently sealed once it is filled with acid
- Truly the world's finest "install it and forget it" motorcycle battery
- Acid pack included, except where noted as Factory-Activated

NOTE: Factory-Activated batteries should be charged once a month when not in service.

NOTE: See pages 852-893 for battery application chart.



YUASA REFERENCE #	CAPACITY AH (10H-R)	COLD CRANKING AMPS @-18 °C (0 °F)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ ACID	TERMINAL CONFIGURATION	PART #
YT4B-BS	2,3	40	114 mm (4 1/2")	40 mm (1 9/16")	87 mm (3 7/16")	1,1 kg (2,4 lb)	-+ (both terminals on left side)	YT4B-BS
YTX4L-BS	3	50	114 mm (4 1/2")	71 mm (2 13/16")	86 mm (3 3/8")	1,5 kg (3,4 lb)	- +	YTX4L-BS
YTZ5S-BS	3,5	65	113 mm (4 7/16")	70 mm (2 3/4")	86 mm (3 3/8")	1,6 kg (3,5 lb)	- +	2113-0359
YTX5L-BS	4	80	114 mm (4 1/2")	71 mm (2 13/16")	106 mm (4 3/16")	1,9 kg (4,2 lb)	- +	YTX5L-BS
YTX7A-BS	6	105	152 mm (6")	87 mm (3 7/16")	95 mm (3 3/4")	2,9 kg (6,3 lb)	+ -	YTX7A-BS
YTX7L-BS	6	100	114 mm (4 1/2")	71 mm (2 13/16")	132 mm (5 3/16")	2,8 kg (6,1 lb)	- +	YTX7L-BS
YT7B-BS	6,5	120	152 mm (6")	65 mm (2 9/16")	94 mm (3 11/16")	2,7 kg (5,9 lb)	+ -	YT7B-BS
YT9B-BS	8	115	152 mm (6")	70 mm (2 3/4")	105 mm (4 1/8")	4 kg (8,7 lb)	+ -	2113-0068
YTX9 (Factory-Activated)	8	135	152 mm (6")	87 mm (3 7/16")	106 mm (4 3/16")	3 kg (6,6 lb)	+ -	2113-0491
YTX9-BS	8	135	152 mm (6")	87 mm (3 7/16")	106 mm (4 3/16")	3 kg (6,6 lb)	+ -	YTX9-BS
YT12A-BS	10	175	152 mm (6")	87 mm (3 7/16")	106 mm (4 3/16")	3,5 kg (7,7 lb)	+ -	YT12A-BS
YT12B-BS	10	210	152 mm (6")	70 mm (2 3/4")	130 mm (5 1/8")	4,1 kg (9 lb)	+ -	YT12B-BS
YTX12-BS	10	180	152 mm (6")	87 mm (3 7/16")	130 mm (5 1/8")	4,2 kg (9,2 lb)	+ -	YTX12-BS
YTX12 (Factory-Activated)	10	180	152 mm (6")	87 mm (3 7/16")	130 mm (5 1/8")	4,2 kg (9,2 lb)	+ -	2113-0756
YTX14L-BS	12	200	152 mm (6")	87 mm (3 7/16")	146 mm (5 3/4")	4,6 kg (10,1 lb)	+ -	2113-0016
YTX14L (Factory-Activated)	12	200	152 mm (6")	87 mm (3 7/16")	146 mm (5 3/4")	4,6 kg (10,1 lb)	+ -	2113-0760
YT14B-BS	12	210	156 mm (6 1/8")	70 mm (2 3/4")	146 mm (5 3/4")	5,4 kg (11,8 lb)	+ -	2113-0069
YTX14-BS	12	200	152 mm (6")	87 mm (3 7/16")	146 mm (5 3/4")	4,6 kg (10,1 lb)	+ -	YTX14-BS
YTX14 (Factory-Activated)	12	200	152 mm (6")	87 mm (3 7/16")	146 mm (5 3/4")	4,6 kg (10,1 lb)	+ -	2113-0757
YTX15L-BS	13	230	175 mm (6 7/8")	87 mm (3 7/16")	130 mm (5 1/8")	5 kg (11 lb)	- +	YTX15L-BS
YTX16-BS	14	230	152 mm (6")	87 mm (3 7/16")	162 mm (6 3/8")	5,7 kg (12,6 lb)	+ -	YTX16-BS
YTX16-BS-1	14	230	152 mm (6")	87 mm (3 7/16")	162 mm (6 3/8")	5,7 kg (12,6 lb)	+ -	YTX16-BS-1
YT19BL-BS	17,7	170	184 mm (7 1/4")	81 mm (3 1/8")	170 mm (6 11/16")	5,66 kg (12,5 lb)	- +	2113-0360
YTX20-BS	18	270	175 mm (6 7/8")	87 mm (3 7/16")	156 mm (6 1/8")	6,3 kg (13,9 lb)	+ -	YTX-20BS
YTX20 (Factory-Activated)	18	270	175 mm (6 7/8")	87 mm (3 7/16")	156 mm (6 1/8")	6,3 kg (13,9 lb)	+ -	2113-0761
YTX20L-BS	18	270	175 mm (6 7/8")	87 mm (3 7/16")	156 mm (6 1/8")	6,3 kg (13,9 lb)	+ -	YTX20L-BS
YTX20L (Factory-Activated)	18	270	175 mm (6 7/8")	87 mm (3 7/16")	156 mm (6 1/8")	6,3 kg (13,9 lb)	- +	2113-0103
YIX30L-BS	30	400	167 mm (6 9/16")	127 mm (5")	175 mm (6 7/8")	10 kg (22 lb)	- +	2113-0102
YIX30L (Factory-Activated)	30	400	167 mm (6 9/16")	127 mm (5")	175 mm (6 7/8")	10 kg (22 lb)	- +	YIX30L

DISCLAIMER: SEE PAGE 4 FOR IMPORTANT INFORMATION REGARDING CERTAIN WARRANTY AND EMISSION CONTROL REGULATORY COMPLIANCE INFORMATION

ELECTRICAL & GAUGES

YUASA BATTERY



Y6N6-3B



Y12N5-3B




BATTERIES

- Yuasa is the world's largest manufacturer of motorcycle batteries and has over 50 years of expertise behind its product
- Harley-Davidson®, Honda, Kawasaki, Suzuki, Yamaha and many others fit Yuasa batteries to their bikes
- Batteries are shipped dry

NOTE: See pages 852-893 for battery application chart.


6V BATTERIES

YUASA REFERENCE #	CAPACITY AH (10H-R)	REGULAR CHARGE CURRENT (AMP)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ OUT ACID	TERMINAL CONFIGURATION	PART #
6N2-2A	2	0,2	70 mm (2 ³ / ₄ "	48 mm (1 ⁷ / ₈ "	95 mm (3 ³ / ₄ "	454 g (1 lb)	-	+ Y6N2-2A
6N2-2A-3	2	0,2	70 mm (2 ³ / ₄ "	48 mm (1 ⁷ / ₈ "	95 mm (3 ³ / ₄ "	454 g (1 lb)	-	+ Y6N2-2A-3
6N2-2A-4	2	0,2	70 mm (2 ³ / ₄ "	48 mm (1 ⁷ / ₈ "	95 mm (3 ³ / ₄ "	454 g (1 lb)	-	+ Y6N2-2A-4
6N2A-2C	2	0,2	70 mm (2 ³ / ₄ "	48 mm (1 ⁷ / ₈ "	106 mm (4 ¹ / ₁₆ "	454 g (1 lb)	+	- Y6N2A-2C
6N2A-2C-3	2	0,2	70 mm (2 ³ / ₄ "	48 mm (1 ⁷ / ₈ "	106 mm (4 ¹ / ₁₆ "	454 g (1 lb)	+	- Y6N2A-2C-3
6N4-2A	4	0,4	71 mm (2 ¹³ / ₁₆ "	71 mm (2 ¹³ / ₁₆ "	95 mm (3 ³ / ₄ "	0,6 kg (1,3 lb)	-	+ Y6N4-2A
6N4-2A-4	4	0,4	71 mm (2 ¹³ / ₁₆ "	71 mm (2 ¹³ / ₁₆ "	95 mm (3 ³ / ₄ "	0,6 kg (1,3 lb)	-	+ Y6N4-2A-4
6N4-2A-5	4	0,4	71 mm (2 ¹³ / ₁₆ "	71 mm (2 ¹³ / ₁₆ "	95 mm (3 ³ / ₄ "	0,6 kg (1,3 lb)	-	+ Y6N4-2A-5
6N4-2A-8	4	0,4	71 mm (2 ¹³ / ₁₆ "	71 mm (2 ¹³ / ₁₆ "	95 mm (3 ³ / ₄ "	0,6 kg (1,3 lb)	-	+ Y6N4-2A-8
6N4A-4D (does not include a vent tube)	4	0,4	60 mm (2 ³ / ₈ "	57 mm (2 ¹ / ₄ "	130 mm (5 ¹ / ₈ "	0,8 kg (1,7 lb)	-	+ Y6N4A-4D
6N4B-2A (does not include a vent tube)	4	0,4	102 mm (4")	48 mm (1 ⁷ / ₈ "	95 mm (3 ³ / ₄ "	0,8 kg (1,7 lb)	+	- Y6N4B-2A
6N4B-2A-3	4	0,4	102 mm (4")	48 mm (1 ⁷ / ₈ "	95 mm (3 ³ / ₄ "	0,8 kg (1,7 lb)	+	- Y6N4B-2A-3
6N4C-1B	4	0,4	71 mm (2 ¹³ / ₁₆ "	71 mm (2 ¹³ / ₁₆ "	105 mm (4 ¹ / ₈ "	0,6 kg (1,4 lb)	-	+ Y6N4C-1B
6N5.5-1D	5,5	0,6	90 mm (3 ⁹ / ₁₆ "	70 mm (2 ³ / ₄ "	100 mm (3 ¹⁵ / ₁₆ "	0,8 kg (1,8 lb)	-	+ Y6N5.5-1D
6N6-1D-2	6	0,6	98 mm (3 ⁷ / ₈ "	57 mm (2 ¹ / ₄ "	111 mm (4 ³ / ₈ "	0,9 kg (2 lb)	-	+ Y6N6-1D-2
6N6-3B	6	0,6	98 mm (3 ⁷ / ₈ "	57 mm (2 ¹ / ₄ "	111 mm (4 ³ / ₈ "	0,9 kg (2 lb)	-	+ Y6N6-3B
6N6-3B-1 (does not include a vent tube)	6	0,6	98 mm (3 ⁷ / ₈ "	57 mm (2 ¹ / ₄ "	111 mm (4 ³ / ₈ "	0,9 kg (2 lb)	-	+ Y6N6-3B-1
6N11-2D	11	1,1	149 mm (5 ⁷ / ₈ "	70 mm (2 ³ / ₄ "	100 mm (3 ¹⁵ / ₁₆ "	1,6 kg (3,5 lb)	+	- Y6N11-2D
6N11A-1B	11	1,1	122 mm (4 ¹³ / ₁₆ "	62 mm (2 ³ / ₁₆ "	130 mm (5 ¹ / ₈ "	1,6 kg (3,5 lb)	-	+ Y6N11A-1B
6N12A-2D	12	1,2	156 mm (6 ¹ / ₈ "	57 mm (2 ¹ / ₄ "	116 mm (4 ⁹ / ₁₆ "	1,7 kg (3,8 lb)	+	- Y6N12A-2D
B38-6A (does not include a vent tube)	13	1,3	119 mm (4 ¹¹ / ₁₆ "	83 mm (3 ¹ / ₄ "	176 mm (6 ¹⁵ / ₁₆ "	2,1 kg (4,7 lb)	-	+ B38-6A



12V BATTERIES

YUASA REFERENCE #	CAPACITY AH (10H-R)	REGULAR CHARGE CURRENT (AMP)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ OUT ACID	TERMINAL CONFIGURATION	PART #
12N5-3B	5	0,5	121 mm (4 ³ / ₄ "	60 mm (2 ³ / ₈ "	130 mm (5 ¹ / ₈ "	1,4 kg (3,1 lb)	+	- Y12N5-3B
12N5.5-3B	5,5	0,6	135 mm (5 ⁵ / ₁₆ "	60 mm (2 ³ / ₈ "	130 mm (5 ¹ / ₈ "	1,95 kg (4,3 lb)	-	+ Y12N5.5-3B
12N5.5-4A	5,5	0,6	135 mm (5 ⁵ / ₁₆ "	60 mm (2 ³ / ₈ "	130 mm (5 ¹ / ₈ "	1,95 kg (4,3 lb)	+	- Y12N5.5-4A
12N5.5A-3B (does not include a vent tube)	5,5	0,6	103 mm (4 ¹ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	114 mm (4 ¹ / ₂ "	1,95 kg (4,3 lb)	-	+ Y12N5.5A-3B
12N7-3B	7	0,7	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	133 mm (5 ¹ / ₄ "	2,2 kg (4,9 lb)	-	+ Y12N7-3B
12N7-4A	7	0,7	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	133 mm (5 ¹ / ₄ "	2,2 kg (4,9 lb)	+	- Y12N7-4A
12N7-4B	7	0,7	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	133 mm (5 ¹ / ₄ "	2,2 kg (4,9 lb)	+	- Y12N7-4B
12N7D-3B (does not include a vent tube)	7	0,7	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	151 mm (5 ¹⁵ / ₁₆ "	2,2 kg (4,9 lb)	-	+ Y12N7D-3B
12N9-3A	9	0,9	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	140 mm (5 ¹ / ₂ "	2,5 kg (5,4 lb)	-	+ Y12N9-3A
12N9-4B-1	9	0,9	135 mm (5 ⁵ / ₁₆ "	76 mm (3")	140 mm (5 ¹ / ₂ "	2,5 kg (5,4 lb)	+	- Y12N9-4B-1
12N12A-4A-1	12	1,2	135 mm (5 ⁵ / ₁₆ "	81 mm (3 ¹ / ₁₆ "	160 mm (6 ⁵ / ₁₆ "	3,1 kg (6,8 lb)	+	- Y12N12A-4A-1
12N14-3A	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,5 lb)	-	+ Y12N14-3A
12N24-3 (does not include a vent tube)	24	2,4	184 mm (7 ¹ / ₄ "	124 mm (4 ⁷ / ₈ "	175 mm (6 ⁷ / ₈ "	5,5 kg (12,1 lb)	-	+ Y12N24-3
YHD-12H	29	2,8	206 mm (8 ¹ / ₈ "	133 mm (5 ¹ / ₄ "	165 mm (6 ¹ / ₂ "	6 kg (13,3 lb)	+	- YHD-12



DISCLAIMER: SEE PAGE 4 FOR IMPORTANT INFORMATION REGARDING CERTAIN WARRANTY AND EMISSION CONTROL REGULATORY COMPLIANCE INFORMATION

BOLD MAGENTA part numbers are new for 2020



YUMICRON 12V BATTERIES


- The most powerful lead-acid battery of its size
- Appears as original equipment on more and more big bikes
- Shipped dry

YUMICRON CX 12V BATTERIES

- Lead/calcium battery has 5% to 8% more cranking power than the high-output Yumicron
- Requires minimal servicing
- Shipped dry

NOTE: See pages 852-893 for battery application chart.

YUMICRON 12V BATTERIES

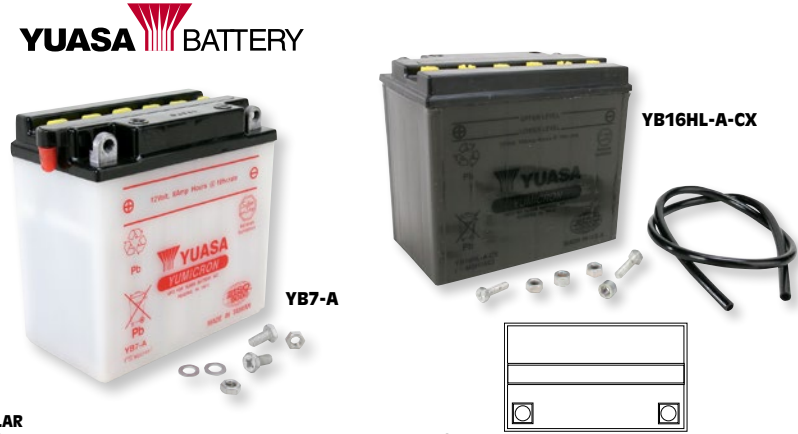

YUASA REFERENCE #	CAPACITY AH (10H-R)	REGULAR CHARGE CURRENT (AMP)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ OUT ACID	TERMINAL CONFIGURATION	PART #
YB2.5L-C (does not include a vent tube)	2,5	0,3	81 mm (3 ¹ / ₁₆ "	70 mm (2 ³ / ₄ "	105 mm (4 ¹ / ₈ "	0,77 kg (1,7 lb)	-	+ YB2.5L-C
YB2.5L-C-1 (does not include a vent tube)	2,5	0,3	81 mm (3 ¹ / ₁₆ "	70 mm (2 ³ / ₄ "	105 mm (4 ¹ / ₈ "	0,77 kg (1,7 lb)	-	+ YB2.5L-C-1
YB3L-A (does not include a vent tube)	3	0,3	98 mm (3 ⁷ / ₈ "	57 mm (2 ¹ / ₄ "	111 mm (4 ³ / ₈ "	1,1 kg (2,5 lb)	-	+ YB3L-A
YB3L-B (does not include a vent tube)	3	0,3	98 mm (3 ⁷ / ₈ "	57 mm (2 ¹ / ₄ "	111 mm (4 ³ / ₈ "	1,1 kg (2,5 lb)	-	+ YB3L-B
YB4L-B	4	0,4	121 mm (4 ³ / ₄ "	70 mm (2 ³ / ₄ "	92 mm (3 ⁵ / ₈ "	1,3 kg (2,8 lb)	-	+ YB4L-B
YB5L-B	5	0,5	121 mm (4 ³ / ₄ "	60 mm (2 ³ / ₈ "	130 mm (5 ¹ / ₈ "	1,6 kg (3,5 lb)	-	+ YB5L-B
YB7B-B	7	0,7	152 mm (6"	60 mm (2 ³ / ₈ "	130 mm (5 ¹ / ₈ "	1,8 kg (4 lb)	+	- YB7B-B
YB7-A (does not include a vent tube)	8	0,8	135 mm (5 ⁵ / ₁₆ "	76 mm (3"	133 mm (5 ¹ / ₄ "	2,3 kg (5,1 lb)	+	- YB7-A
YB7C-A	8	0,8	130 mm (5 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	114 mm (4 ¹ / ₂ "	2,3 kg (5,1 lb)	-	+ YB7C-A
YB7L-B	8	0,8	135 mm (5 ⁵ / ₁₆ "	76 mm (3"	133 mm (5 ¹ / ₄ "	2,3 kg (5,1 lb)	-	+ YB7L-B
YB9-B (does not include a vent tube)	9	0,9	135 mm (5 ⁵ / ₁₆ "	76 mm (3"	140 mm (5 ¹ / ₂ "	2,4 kg (5,3 lb)	+	- YB9-B
YB9L-A2 (does not include a vent tube)	9	0,9	135 mm (5 ⁵ / ₁₆ "	76 mm (3"	140 mm (5 ¹ / ₂ "	2,4 kg (5,3 lb)	-	+ YB9L-A2
YB9L-B	9	0,9	135 mm (5 ⁵ / ₁₆ "	76 mm (3"	140 mm (5 ¹ / ₂ "	2,4 kg (5,3 lb)	-	+ YB9L-B
YB10A-A2	11	1,1	135 mm (5 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	156 mm (6 ¹ / ₈ "	3,2 kg (7 lb)	+	- YB10A-A2
YB10L-A2	11	1,1	135 mm (5 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	146 mm (5 ³ / ₄ "	3,2 kg (7 lb)	-	+ YB10L-A2
YB10L-B	11	1,1	135 mm (5 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	146 mm (5 ³ / ₄ "	3,2 kg (7 lb)	-	+ YB10L-B
YB10L-B2	11	1,1	135 mm (5 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	146 mm (5 ³ / ₄ "	3,2 kg (7 lb)	-	+ YB10L-B2
YB12A-A	12	1,2	135 mm (5 ⁵ / ₁₆ "	81 mm (3 ¹ / ₁₆ "	160 mm (6 ⁵ / ₁₆ "	3,1 kg (6,8 lb)	+	- YB12A-A
YB12A-B	12	1,2	135 mm (5 ⁵ / ₁₆ "	81 mm (3 ¹ / ₁₆ "	160 mm (6 ⁵ / ₁₆ "	3,1 kg (6,8 lb)	+	- YB12A-B
YB12AL-A	12	1,2	135 mm (5 ⁵ / ₁₆ "	81 mm (3 ¹ / ₁₆ "	160 mm (6 ⁵ / ₁₆ "	3,1 kg (6,8 lb)	-	+ YB12AL-A
YB12AL-A2 (includes terminal adaptor for converting to top mount)	12	1,2	135 mm (5 ⁵ / ₁₆ "	81 mm (3 ¹ / ₁₆ "	160 mm (6 ⁵ / ₁₆ "	3,1 kg (6,8 lb)	-	+ YB12AL-A2
YB12B-B2 (does not include a vent tube)	12	1,2	160 mm (6 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	130 mm (5 ¹ / ₈ "	3,2 kg (7,1 lb)	+	- YB12B-B2
YB12C-A (does not include a vent tube)	12	1,2	135 mm (5 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	175 mm (6 ⁷ / ₈ "	3,2 kg (7,1 lb)	+	- YB12C-A
YB14-A2	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	+	- YB14-A2
YB14A-A1 (does not include a vent tube)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	176 mm (6 ¹⁵ / ₁₆ "	3,6 kg (7,9 lb)	+	- YB14A-A1
YB14A-A2 (does not include a vent tube)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	176 mm (6 ¹⁵ / ₁₆ "	3,6 kg (7,9 lb)	+	- YB14A-A2
YB14-B2 (does not include a vent tube)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	+	- YB14-B2
YB14L-A1 (does not include a vent tube)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	-	+ YB14L-A1
YB14L-A2	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	-	+ YB14L-A2
SYB14L-A2 (includes a sensor)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	-	+ SYB14L-A2
YB14L-B2 (does not include a vent tube)	14	1,4	135 mm (5 ⁵ / ₁₆ "	89 mm (3 ¹ / ₂ "	167 mm (6 ⁹ / ₁₆ "	3,4 kg (7,6 lb)	-	+ YB14L-B2
YB16AL-A2 (does not include a vent tube)	16	1,6	206 mm (8 ¹ / ₈ "	71 mm (2 ¹³ / ₁₆ "	164 mm (6 ⁹ / ₁₆ "	3,9 kg (8,6 lb)	-	+ YB16AL-A2
YB16B-A (does not include a vent tube)	16	1,6	160 mm (6 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	3,8 kg (8,4 lb)	+	- YB16B-A
YB16B-A1 (does not include a vent tube; includes terminal adapter for converting to side mount)	16	1,6	160 mm (6 ⁵ / ₁₆ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	3,8 kg (8,4 lb)	+	- YB16B-A1
HYB16A-AB (does not include a vent tube)	16	1,6	152 mm (6"	92 mm (3 ⁵ / ₈ "	179 mm (7 ¹ / ₁₆ "	3,9 kg (8,5 lb)	+	- HYB16A-AB
YB18-A (does not include a vent tube)	18	1,8	181 mm (7 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	4,26 kg (9,4 lb)	+	- YB18-A
YB18L-A	18	1,8	181 mm (7 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	4,26 kg (9,4 lb)	-	+ YB18L-A
YB16-B	19	1,9	175 mm (6 ⁷ / ₈ "	102 mm (4"	156 mm (6 ¹ / ₈ "	4,8 kg (10,5 lb)	+	- YB16-B
YB16L-B	19	1,9	175 mm (6 ⁷ / ₈ "	102 mm (4"	156 mm (6 ¹ / ₈ "	4,8 kg (10,5 lb)	-	+ YB16L-B
YB16C-B	19	1,9	175 mm (6 ⁷ / ₈ "	102 mm (4"	175 mm (6 ⁷ / ₈ "	4,6 kg (10,1 lb)	+	- YB16C-B
YB16CL-B	19	1,9	175 mm (6 ⁷ / ₈ "	102 mm (4"	175 mm (6 ⁷ / ₈ "	4,6 kg (10,1 lb)	-	+ YB16CL-B
51814 (does not include a vent tube)	19 (DIN Standard @ 20 hr. rate)	1,9	189 mm (7 ⁷ / ₁₆ "	83 mm (3 ¹ / ₄ "	175 mm (6 ⁷ / ₈ "	4,26 kg (9,4 lb)	-	+ 51814
51913 (does not include a vent tube)	19 (DIN Standard @ 20 hr. rate)	1,9	189 mm (7 ⁷ / ₁₆ "	83 mm (3 ¹ / ₄ "	175 mm (6 ⁷ / ₈ "	4,26 kg (9,4 lb)	-	+ 51913
Y50-N18L-A	20	2,0	206 mm (8 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	5 kg (11,2 lb)	-	+ Y50-N18L-A
Y50-N18L-A3 (does not include a vent tube)	20	2,0	206 mm (8 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	5 kg (11,2 lb)	-	+ Y50-N18L-A3
SY50-N18L-AT (includes a sensor)	20	2,0	206 mm (8 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	5 kg (11,2 lb)	-	+ SY50-N18L-AT
YB30CL-B (does not include a vent tube)	30	3,0	168 mm (6 ⁵ / ₈ "	132 mm (5 ³ / ₁₆ "	192 mm (7 ⁹ / ₁₆ "	6,6 kg (14,5 lb)	-	+ YB30CL-B
YB30L-B	30	3,0	168 mm (6 ⁵ / ₈ "	132 mm (5 ³ / ₁₆ "	176 mm (6 ¹⁵ / ₁₆ "	6,4 kg (14,1 lb)	-	+ YB30L-B
53030 (does not include a vent tube)	30 (DIN Standard @ 20 hr. rate)	3,0	189 mm (7 ⁷ / ₁₆ "	130 mm (5 ¹ / ₈ "	175 mm (6 ⁷ / ₈ "	7,3 kg (16,1 lb)	-	+ 53030

YUMICRON CX 12V BATTERIES

YUASA REFERENCE #	CAPACITY AH (10H-R)	REGULAR CHARGE CURRENT (AMP)	LENGTH	WIDTH	HEIGHT	APPROX. WEIGHT W/ OUT ACID	TERMINAL CONFIGURATION	PART #
YB16HL-A-CX	19	1,9	175 mm (6 ⁷ / ₈ "	102 mm (4"	156 mm (6 ¹ / ₈ "	4,8 kg (10,5 lb)	-	+ YB16HL-A-CX
Y50-N18L-A-CX	20	2,0	206 mm (8 ¹ / ₈ "	90 mm (3 ⁹ / ₁₆ "	162 mm (6 ³ / ₈ "	5 kg (11,2 lb)	-	+ Y50-N18L-A-CX

DISCLAIMER: SEE PAGE 4 FOR IMPORTANT INFORMATION REGARDING CERTAIN WARRANTY AND EMISSION CONTROL REGULATORY COMPLIANCE INFORMATION

- EXHAUST
- LUGGAGE
- COVERS & SECURITY
- GENERAL ACCESSORIES
- WINDSHIELDS
- FAIRINGS & BODY
- SEATS & SISSY BARS
- HANDLEBARS & HAND CONTROLS
- FOOTPEGS & FOOT CONTROLS
- LIGHTING
- ELECTRICAL & GAUGES
- SPROCKETS
- CHAINS & DRIVE BELTS
- WHEELS & ACCESSORIES
- BRAKES
- SUSPENSION
- ENGINE
- FUEL/AIR SYSTEMS
- AUDIO/VIDEO & MOUNTS
- RIDER ACCESSORIES
- HARDWARE & MERCHANDISING
- INDEX



51814	BATTERY YUMICRON 12V 186 MM X 82 MM X 171 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 92,00
51913	BATTERY YUMICRON 12V 186 MM X 82 MM X 171 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 83,00
53030	BATTERY YUMICRON 12V 188 MM X 129,54 MM X 172,72 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 110,00
B38-6A	BATTERY CONVENTIONAL 6V 119 MM X 83 MM X 161 MM LEAD ACID REPLACEMENT CLEAR	€ 46,00
SY50-N18L-AT	BATTERY YUMICRON 12V 205 MM X 90 MM X 162 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 97,00
SYB14L-A2	BATTERY YUMICRON 12V 134 MM X 89 MM X 166 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 80,00
Y12N12A-4A-1	BATTERY CONVENTIONAL 12V 134 MM X 80 MM X 160 MM LEAD ACID REPLACEMENT CLEAR	€ 63,00
Y12N14-3A	BATTERY CONVENTIONAL 12V 134 MM X 89 MM X 166 MM LEAD ACID REPLACEMENT CLEAR	€ 65,00
Y12N24-3	BATTERY CONVENTIONAL 12V 184 MM X 124 MM X 175 MM LEAD ACID REPLACEMENT CLEAR	€ 115,00
Y12N5-3B	BATTERY CONVENTIONAL 12V 120 MM X 58,42 MM X 129,54 MM LEAD ACID REPLACEMENT CLEAR	€ 33,00
Y12N5.5-3B	BATTERY CONVENTIONAL 12V 135 MM X 60 MM X 130 MM LEAD ACID REPLACEMENT CLEAR	€ 32,00
Y12N5.5-4A	BATTERY CONVENTIONAL 12V 135 MM X 60 MM X 130 MM LEAD ACID REPLACEMENT CLEAR	€ 31,00
Y12N5.5A-3B	BATTERY CONVENTIONAL 12V 101,6 MM X 58,42 MM X 114 MM LEAD ACID REPLACEMENT CLEAR	€ 42,00

Y12N7-3B	BATTERY PARTS UNLIMITED 12V 135 MM X 75 MM X 133 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 33,00
Y12N7-4A	BATTERY CONVENTIONAL 12V 135 MM X 75 MM X 133 MM LEAD ACID REPLACEMENT CLEAR	€ 37,00
Y12N7-4B	BATTERY CONVENTIONAL 12V 134,62 MM X 75 MM X 133 MM LEAD ACID REPLACEMENT CLEAR	€ 60,00
Y12N7D-3B	BATTERY CONVENTIONAL 12V 134,62 MM X 75 MM X 149,86 MM LEAD ACID REPLACEMENT CLEAR	€ 44,00
Y12N9-3A	BATTERY CONVENTIONAL 12V 135 MM X 75 MM X 139 MM LEAD ACID REPLACEMENT CLEAR	€ 52,00
Y12N9-4B-1	BATTERY CONVENTIONAL 12V 135 MM X 75 MM X 139 MM LEAD ACID REPLACEMENT CLEAR	€ 46,00
%Sale Y50-N18A-A	BATTERY YUMICRON 12V 205,74 MM X 89 MM X 175 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 143,00
Y50-N18L-A	BATTERY YUMICRON 12V 205,74 MM X 89 MM X 160,02 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 90,00
Y50-N18L-A3	BATTERY CONVENTIONAL 12V 205 MM X 90 MM X 162 MM LEAD ACID REPLACEMENT CLEAR	€ 101,00
Y50-N18L-A-CX	BATTERY YUMICRON CX 12V 205,74 MM X 89 MM X 162,56 MM CONVENTIONAL LEAD ACID REPLACEMENT BLACK	€ 108,00
Y6N11A-1B	BATTERY CONVENTIONAL 6V 122 MM X 62 MM X 131 MM LEAD ACID REPLACEMENT CLEAR	€ 40,00
Y6N12A-2D	BATTERY CONVENTIONAL 6V 156 MM X 57 MM X 116 MM LEAD ACID REPLACEMENT CLEAR	€ 47,00
Y6N2-2A	BATTERY CONVENTIONAL 6V 70 MM X 47 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 16,00
Y6N2-2A-3	BATTERY CONVENTIONAL 6V 70 MM X 47 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N2-2A-4	BATTERY CONVENTIONAL 6V 70 MM X 47 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 21,00
Y6N2A-2C	BATTERY CONVENTIONAL 6V 70 MM X 47 MM X 106 MM LEAD ACID REPLACEMENT CLEAR	€ 23,00
Y6N2A-2C-3	BATTERY CONVENTIONAL 6V 70 MM X 47 MM X 106 MM LEAD ACID REPLACEMENT CLEAR	€ 18,00
Y6N4-2A	BATTERY CONVENTIONAL 6V 71,12 MM X 71,12 MM X 95,25 MM LEAD ACID REPLACEMENT CLEAR	€ 18,00
Y6N4-2A-4	BATTERY CONVENTIONAL 6V 71 MM X 71 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N4-2A-5	BATTERY CONVENTIONAL 6V 71 MM X 71 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N4-2A-8	BATTERY CONVENTIONAL 6V 71 MM X 71 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N4A-4D	BATTERY CONVENTIONAL 6V 61 MM X 57 MM X 131 MM LEAD ACID REPLACEMENT CLEAR	€ 34,00
Y6N4B-2A	BATTERY CONVENTIONAL 6V 102 MM X 48 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N4B-2A-3	BATTERY CONVENTIONAL 6V 102 MM X 48 MM X 96 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N4C-1B	BATTERY CONVENTIONAL 6V 71 MM X 71 MM X 105 MM LEAD ACID REPLACEMENT CLEAR	€ 24,00
Y6N5.5-1D	BATTERY CONVENTIONAL 6V 90 MM X 70 MM X 100 MM LEAD ACID REPLACEMENT CLEAR	€ 14,00
Y6N6-1D-2	BATTERY CONVENTIONAL 6V 99 MM X 57 MM X 111 MM LEAD ACID REPLACEMENT CLEAR	€ 39,00
Y6N6-3B	BATTERY CONVENTIONAL 6V 99 MM X 57 MM X 111 MM LEAD ACID REPLACEMENT CLEAR	€ 22,00
Y6N6-3B-1	BATTERY CONVENTIONAL 6V 99 MM X 57 MM X 111 MM LEAD ACID REPLACEMENT CLEAR	€ 23,00
YB10A-A2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 139 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 47,00
YB10L-A2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 145 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 55,00
YB10L-B	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 145 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 54,00
YB10L-B2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 145 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 53,00
YB12A-A	BATTERY YUMICRON 12V 134,62 MM X 78,74 MM X 160,02 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 53,00
YB12A-B	BATTERY YUMICRON 12V 134,62 MM X 78,74 MM X 160,02 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 61,00
YB12AL-A	BATTERY YUMICRON 12V 134,62 MM X 78,74 MM X 160,02 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 59,00
YB12AL-A2	BATTERY YUMICRON 12V 134,62 MM X 78,74 MM X 160,02 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 53,00
YB12B-B2	BATTERY YUMICRON 12V 160,02 MM X 89 MM X 129,54 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 69,00
YB12C-A	BATTERY YUMICRON 12V 134,62 MM X 78,74 MM X 172,72 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 64,00
YB14-A2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 165 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 55,00
YB14A-A1	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 175 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 68,00
YB14A-A2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 175 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 65,00

YB14-B2	BATTERY YUMICRON 12V 134 MM X 89 MM X 166 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 64,00
YB14L-A1	BATTERY YUMICRON 12V 134 MM X 89 MM X 166 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 70,00
YB14L-A2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 165 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 57,00
YB14L-B2	BATTERY YUMICRON 12V 134,62 MM X 89 MM X 166 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 64,00
YB16AL-A2	BATTERY YUMICRON 12V 207 MM X 71,5 MM X 164 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 85,00
YB16-B	BATTERY YUMICRON 12V 175 MM X 100 MM X 155 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 95,00
YB16B-A	BATTERY YUMICRON 12V 134 MM X 90 MM X 161 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 95,00
YB16B-A1	BATTERY YUMICRON 12V 160 MM X 90 MM X 161 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 102,00
YB16CB	BATTERY YUMICRON 12V 175 MM X 100 MM X 175 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 86,00
YB16CL-B	BATTERY YUMICRON 12V 172,72 MM X 100 MM X 172,72 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 118,00
YB16HL-A-CX	BATTERY YUMICRON CX 12V 175 MM X 100 MM X 155 MM CONVENTIONAL LEAD ACID REPLACEMENT BLACK	€ 110,00
YB16L-B	BATTERY YUMICRON 12V 175 MM X 100 MM X 155 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 99,00
YB18-A	BATTERY YUMICRON 12V 180 MM X 90 MM X 162 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 102,00
YB18-LA	BATTERY YUMICRON 12V 180 MM X 90 MM X 162 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 107,00
YB2.5L-C	BATTERY YUMICRON 12V 78,74 MM X 70 MM X 104,14 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 28,00
YB2.5L-C-1	BATTERY YUMICRON 12V 78,74 MM X 70 MM X 104,14 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 37,00
YB30CL-B	BATTERY YUMICRON 12V 168 MM X 132 MM X 192,2 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 157,00
YB30L-B	BATTERY YUMICRON 12V 168 MM X 129,54 MM X 175 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 129,00
YB3L-A	BATTERY YUMICRON 12V 96,52 MM X 57 MM X 109,22 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 26,00
YB3L-B	BATTERY YUMICRON 12V 96,52 MM X 57 MM X 109,22 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 28,00
YB4L-B	BATTERY YUMICRON 12V 120 MM X 70 MM X 91,44 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 17,00
YB5L-B	BATTERY YUMICRON 12V 120 MM X 58,42 MM X 129,54 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 28,00
YB7-A	BATTERY YUMICRON 12V 134,62 MM X 75 MM X 133 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 42,00
YB7B-B	BATTERY YUMICRON 12V 150 MM X 58,42 MM X 129,54 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 39,00
YB7C-A	BATTERY YUMICRON 12V 129,54 MM X 89 MM X 114 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 57,00
YB7L-B	BATTERY YUMICRON 12V 134,62 MM X 75 MM X 133 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 49,00
YB9-B	BATTERY YUMICRON 12V 134,62 MM X 75 MM X 139 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 36,00
YB9L-A2	BATTERY YUMICRON 12V 134,62 MM X 75 MM X 139 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 57,00
YB9L-B	BATTERY YUMICRON 12V 134,62 MM X 75 MM X 139 MM CONVENTIONAL LEAD ACID REPLACEMENT CLEAR	€ 46,00
YHD-12	BATTERY CONVENTIONAL 12V 205,74 MM X 133 MM X 165 MM LEAD ACID REPLACEMENT CLEAR	€ 121,00